

+91 94957 38487

lavalletiles@gmail.com

www.lavalletiles.com

◆ A J Enterprises


A J Enterprises manufactures and supplies good quality PVC interlocked flooring tiles (PVC Tiles) in India since 2011. We are operating out of Kerala, India.

◆ Lavalle - PVC Interlocking floor tiles

Our PVC Tiles, branded as "Lavalle", is a robust and proven flooring solution for all types of industries. We manufacture the tiles using good quality raw materials, sourced from local market, so that we can assure the quality and consistency of the PVC tiles we manufacture. We are a total solution provider, i.e we manufacture the pvc tiles and also undertake the laying work at the project site, anywhere in India. Some of our first customers still remains as our loyal customers.

Lavalle tiles bring life to your floors. Lavalle tiles are specifically designed for factory/workshop floors where lot of foot/trolley/vehicle movements happen. In these work environments, floors are prone to damages and the average life expectancy is less than two years. Lavalle tiles withstand high pressure and torque from vehicle/fork lift wheels. Lavalle tiles are flexible in nature, so they can absorb weight impacts. Lavalle tiles are interlocked to each other, so it works as a floor carpet. Lavalle tiles are not fixed to the underlying floor permanently. So, in case of a factory relocation or a change in the floor layout, the tiles can be easily dismantled and reused.

The life expectancy of Lavalle tile is at least 3 to 5 times more, compared to other industrial flooring solutions. Lavalle tiles come in red, green, blue, grey and black colors. We maintain a team of professionals who can travel to your plant location and do the laying work of Lavalle tiles.

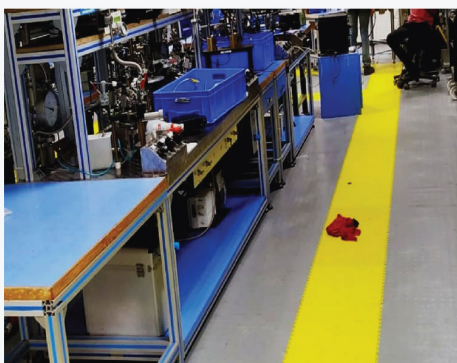

Our Highlights

- Robust & Longlasting flooring
- Modular Installation
- Permanent / Semi Permanent Floor
- Agile Team




◆ Physical Specifications / Characteristics

- 1 PVC Tile = 2.25 Sq.ft.
- Weight : 1.24Kg - 1.26 Kg
- Elongation rate : 280%
- Tear strength : 30kgf/cm
- Tensile strength : 2.80 kg/cm²
- Hardness (shore D) : 70 (ASTM D 2240)
- Density : 1.38 - 1.46 gm/cc (ASTM D 792)
- Sulphated ash content : 20.04 (IS 12235 Pt. 17)
- Dimensions : Length : 464 mm; Width : 464 mm; Thickness : 5 mm
- Water resistance : No change of discoloration and deterioration observed
- Acid resistance (Sulphuric acid) : No change of discoloration and deterioration observed for dilute sulphuric acid (with 10% and 50 % concentration).
But, discolouration and deterioration was observed for concentrated sulphuric acid.
- Alkali resistance (Sodium Hydroxide) : No change of discoloration and deterioration observed.


◆ Advantages of PVC Tiles

- Hygienic ● Attractive ● Slip-resistant ● Easy & quick to install
- Provides insulation ● Can be loose laid with minimal floor preparation
- Can withstand frequent forklift / vehicle / foot movement

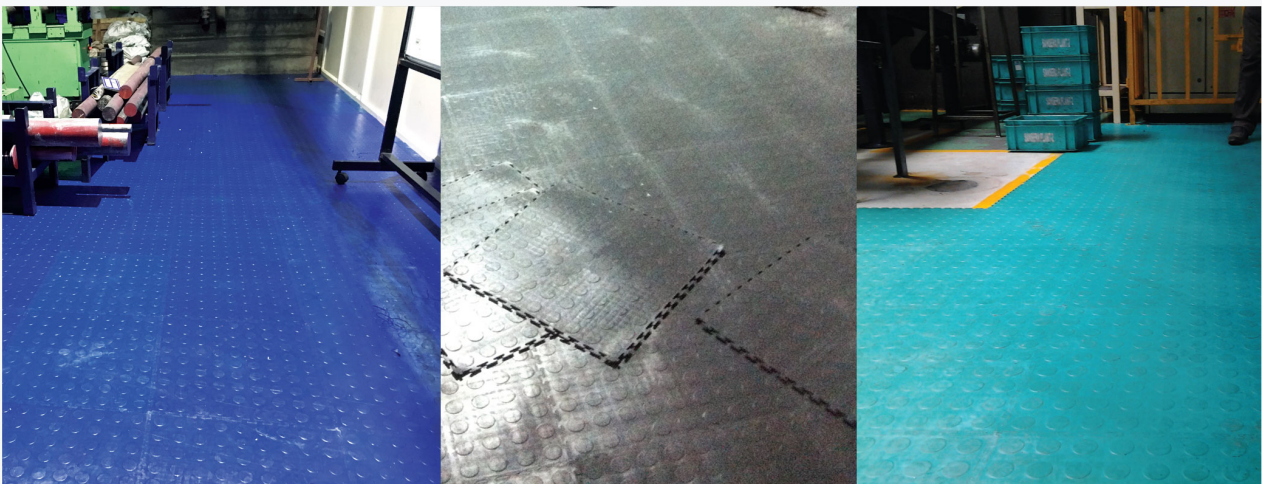

◆ Lavalle Tiles Applications

Lavalle tiles are suitable for work areas which require a strong, long lasting and permanent or semi-permanent floor. Lavalle pvc tiles are ideal for floor areas where lot of foot/trolley/forklift movement is expected. PVC tile flooring can be done on new floors or old floors, where other flooring solutions are already tried.

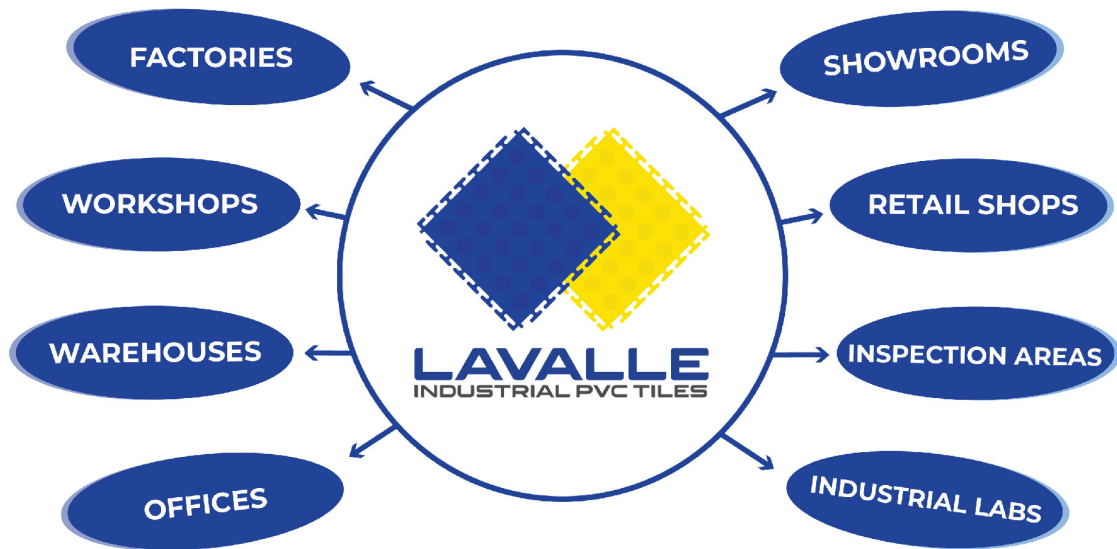

◆ Cleaning and Maintenance

Cleaning of Lavalle tile flooring is very easy. Sweep the floor regularly to remove dirt particles, metal scraps or any other foreign particles. The floors can be damp mopped. Regular soap water or any other mild cleaning agents can be used to remove oil or mud stains. If oil/water spillage happens on the floor, it is advisable to mop the area within 10-15 minutes.



A J Enterprises

- 📍 TC 25/1180, 'Dhanush', Machingal Lane, Thrissur, Kerala, India, Pin – 680 001
- ✉ info@lavalletiles.com, lavalletiles@gmail.com
- ☎ +91 94957 38487
- 📞 +91 88487 03459
- 🌐 www.lavalletiles.com
- GSTIN 32BJXPP5968B1ZP

